

DATASHEET

# Rockfon Blanka® Bas



**Sounds Beautiful**

# Rockfon Blanka® Bas





- Ideal for areas requiring sound reflection to promote speech intelligibility such as in classrooms and conference rooms
- Smooth, deep matt, super white surface providing visual continuity with entire Rockfon Blanka product range
- High light reflection and light diffusion, which contributes to energy savings and a bright and comfortable indoor environment
- The enhanced surface durability makes Rockfon Blanka Bas more resistant to dirt and everyday wear and tear, extending the product lifetime
- A-edge tile in basic range of dimensions

## Product Description

- Stone wool tile
- Visible side: smooth, deep-matt and super-white painted fleece above aluminium complex
- Rear side: back fleece
- Durable Painted edges

## Application Areas

- Office
- Education
- Leisure

Edge detail	Module size (mm)	Weight (kg/m <sup>2</sup> )	MS / MS easy access (mm)	Recommended installation system	Recycled content	Cradle to Cradle Certified®	A1-A3 Production stage impact (kg CO <sub>2</sub> eq/m <sup>2</sup> )*	A1-C4 Full life cycle impact (kg CO <sub>2</sub> eq/m <sup>2</sup> )*
 A15	600 x 600 x 20	3,4	50 / 100	Rockfon® System T15 A™	37%		3,4	4,37
	1200 x 600 x 20		50 / 100	Rockfon® System T15 A™				
 A24	600 x 600 x 20	3,4	50 / 100	Rockfon® System T24 A™	37%		3,4	4,37
	1200 x 600 x 20		50 / 100	Rockfon® System XL T24 A™				
			50 / 100	Rockfon® System T24 A™				
	50 / 100		Rockfon® System Bandraaster A™					

MS = Minimum suspension

MS easy access = Minimum suspension - tiles demountable

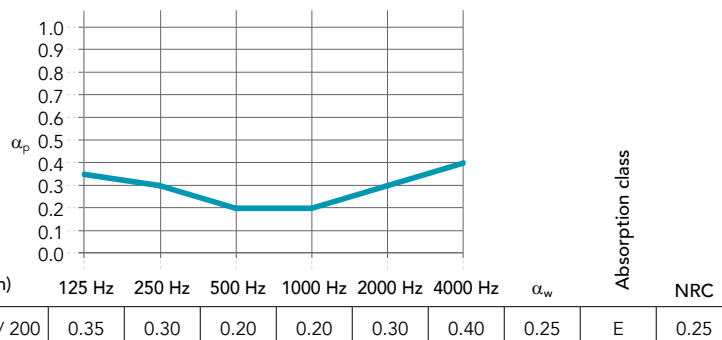
\* For full environmental impact disclosure, see our product EPDs available on [rockfon.link/cee-epd](https://rockfon.link/cee-epd). Due to differences in calculation methods and scenario assumptions, environmental impact values are generally not directly comparable between manufacturers.



## Performance



**Sound absorption**  
 $\alpha_w$ : 0,25 (Class E)



**Reaction to fire**  
 A2-s1,d0



**Light reflection and light diffusion**  
 87% light reflection  
 >99% light diffusion



**Humidity and sag resistance**  
 Up to 100% RH.  
 No visible deflection in high humidity  
 C/0N



**Cleaning**  
 - Vacuum  
 - Damp cloth



**Hygiene**  
 Stone wool provides no sustenance to microorganisms



**Surface durability**  
 Enhanced durability and dirt resistance.  
 Wet-scrub resistance: Class 4

*The wet-scrub resistance is tested in accordance with EN ISO 11998:2006 and rated following EN 12720:2009+A1:2013 scale going from 1 to 5, where 5 is the best.*



**Visual appearance**  
 Super-white surface  
 L value: 94.5  
*The whiteness (L value) of the product is tested in accordance with ISO 7724 and measured on a scale from 1 (black) to 100 (white).*

Deep matt surface, perfect in critical side-light  
 Gloss: 0.8 gloss unit at 85° angle  
*The gloss of the product is tested in accordance with ISO 2813.*



**Recyclability**  
 Fully recyclable stone wool



**Indoor environment**  
 Rockfon ceiling products are classified in Class E1 in accordance with EN 13964 (EN 717-1).



**Material Health**  
 All materials used in Rockfon products are screened against the list of substances restricted under REACH and do not contain substances of very high concern (SVHC). Rockfon stone wool fibres comply with the safe fibre EU regulation and hold an EUCEB certification.

# Sounds Beautiful

