

DATASHEET

Rockfon CleanSpace® Pure



Sounds Beautiful

Rockfon CleanSpace® Pure







- Rockfon CleanSpace Pure is a smooth, deep-matt, pure white cleanable ceiling tile with good acoustic properties. Applicable in various room types with cleanability requirements. The product is long-lasting and withstands numerous cleaning and disinfection methods
- Full range of dimensions and edges for complete design freedom
- High sound absorption (Class A) and highest fire safety (Class A1)
- Low particle emission: ISO Class 3

Product Description

- Stone wool tile
- Visible side: smooth, deep-matt and super-white painted fleece
- Rear side: back fleece
- Durable painted edges

Application Areas

- Healthcare
- Education
- Leisure
- Retail

Edge detail	Module size (mm)	Weight (kg/m ²)	MS / MS easy access (mm)	Recommended installation system	Recycled content	Cradle to Cradle Certified®	A1-A3 Production stage impact (kg CO ₂ eq/m ²)*	A1-C4 Full life cycle impact (kg CO ₂ eq/m ²)*
 A24	600 x 600 x 20	2,3	100 / 100	Rockfon® System CleanSpace T24 A, E (ECR) [™]	38%		2,25	2,84
	1200 x 600 x 20		100 / 100	Rockfon® System CleanSpace T24 A, E (ECR) [™]				
	600 x 600 x 40	4,1	100 / 200	Rockfon® System CleanSpace T24 A, E (ECR) [™]	38%		3,85	4,99
	1200 x 600 x 40		100 / 200	Rockfon® System CleanSpace T24 A, E (ECR) [™]				
 E24	600 x 600 x 20	2,8	100 / 100	Rockfon® System CleanSpace T24 A, E (ECR) [™]	38%		2,96	3,74
	1200 x 600 x 20		100 / 100	Rockfon® System CleanSpace T24 A, E (ECR) [™]				
 X	600 x 600 x 22	3,7	66 / 66	Rockfon® System T24 X [™]	38%		3,23	4,34
			104 / 104	Rockfon® System T24 X DLC [™]				
	1200 x 600 x 22		66 / 66	Rockfon® System T24 X [™]				
			104 / 104	Rockfon® System T24 X DLC [™]				

MS = Minimum suspension

MS easy access = Minimum suspension - tiles demountable

Rockfon System CleanSpace T24 A, E Class B (not ECR) and Rockfon System T24 X / T24X DLC can only be used when cleaning with aggressive chemicals or disinfectants is not required.

* For full environmental impact disclosure, see our product EPDs available on rockfon.link/cee-epd. Due to differences in calculation methods and scenario assumptions, environmental impact values are generally not directly comparable between manufacturers.



Performance

Sound absorption
 α_w : up to 1,00 (Class A)

Reaction to fire
 A1

Light reflection and light diffusion
 86% light reflection
 >99% light diffusion

Humidity and sag resistance
 Up to 100% RH.
 No visible deflection in high humidity
 C/0N

Cleaning

- Vacuum
- Damp cloth
- High pressure cleaning (monthly and only applicable for A-edge installation). Max. 80 bar, min. 1 meter distance, water spread at 30° angle, max. water flow 360 L/h. The tiles should be clipped into the grid.
- Chemical resistance: Tested according to ISO 2812-3:2019 and classified in accordance with EN 12720. Rating on a scale from 1 to 5, where 5 is the best. We obtained 5 for the following detergents and disinfectants (weekly disinfection): Active chlorine 2,6%, quaternary ammonium 0,25%, hydrogen peroxide 5%, Ethanol 70% and Isopropanol 70%
- Use only soft equipment directly on the tile surface: cloth or sponge. Avoid scraping or stiff brush rubbing.

Hygiene
 Stone wool provides no sustenance to microorganisms
 Microbiological class M1 fulfilling the requirements of Zone 4 (very high risk) defined by NF S 90-351:2013.
 Tested with:


- Methicillin resistant staphylococcus aureus (MRSA)
- Candida albicans
- Aspergillus brasiliensis
- E. Coli
- Bacillus cereus

M1 (zone 4) for the 5 tested pathogens.

The particle elimination kinetics class is conform to CP(0,5)5 according to the norm NF S 90-351:2013.

Surface durability
 Enhanced durability and dirt resistance.

Wet-scrub resistance: Class 5
 The wet-scrub resistance is tested in accordance with EN ISO 11998:2006 and rated following EN 12720:2009+A1:2013 scale going from 1 to 5, where 5 is the best.

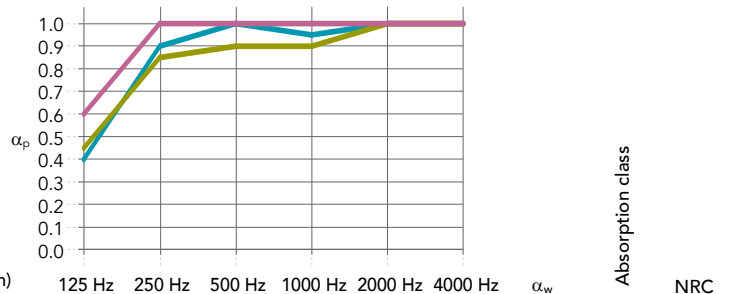

Thickness (mm) / Suspension (incl. tile - mm)	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	α_w	Absorption class	NRC
A,E: 20 / 200	0.40	0.90	1.00	0.95	1.00	1.00	1.00	A	0.95
X: 22 / 200	0.45	0.85	0.90	0.90	1.00	1.00	0.95	A	0.95
A: 40 / 200	0.60	1.00	1.00	1.00	1.00	1.00	1.00	A	1.05

Disinfection

- Resistant to using Hydrogen Peroxide Vapor disinfection with impact on aeration time
- Can withstand and will not be affected by UVC and Ozone disinfection

Clean Room
 ISO Class 3

Visual appearance
 Super-white surface
 L value: 94.5
 The whiteness (L value) of the product is tested in accordance with ISO 7724 and measured on a scale from 1 (black) to 100 (white).

Deep matt surface, perfect in critical side-light
 Gloss: 0.8 gloss unit at 85° angle
 The gloss of the product is tested in accordance with ISO 2813.

Recyclability
 Fully recyclable stone wool

Indoor environment
 Rockfon ceiling products are classified in Class E1 in accordance with EN 13964 (EN 717-1). Rockfon ceiling products have a very low release of VOCs. A selection of Rockfon products have achieved the following performance levels and labels in indoor air emissions:



Material Health
 All materials used in Rockfon products are screened against the list of substances restricted under REACH and do not contain substances of very high concern (SVHC). Rockfon stone wool fibres comply with the safe fibre EU regulation and hold an EUCEB certification.

Sounds Beautiful

