


DATASHEET

Rockfon® Samson wall panel

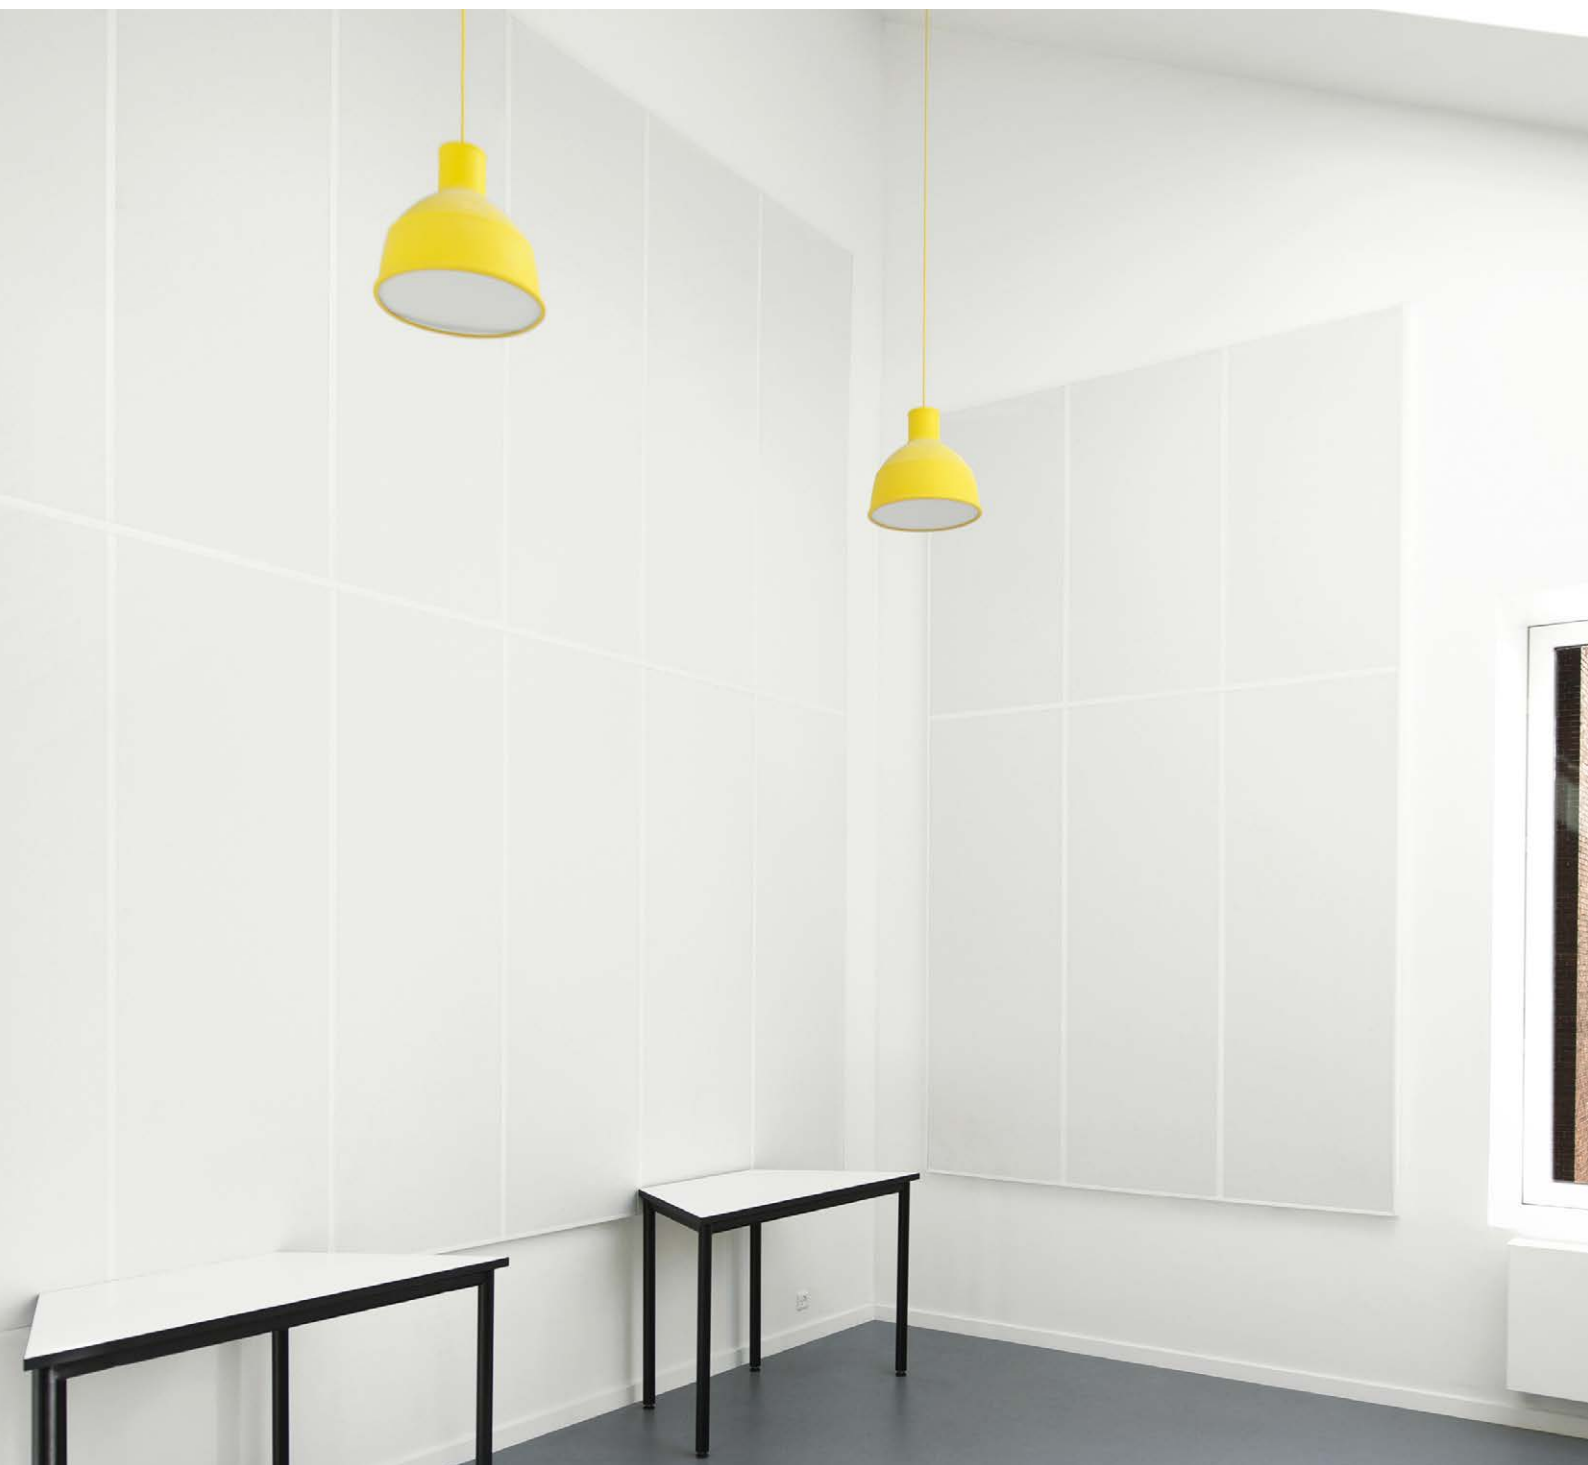

Sounds Beautiful

Rockfon® Samson wall panel

- Highly impact-resistant white or grey woven surface, ideal for high activity areas such as schools and sports facilities
- Good sound absorption for noisy and reverberant areas
- For use in areas where there is a high risk of occasional impact

Product Description

- Stone wool panel
- Visible side: durable woven surface
- Rear side: back fleece
- Painted edges

Application Areas

- Retail
- Education
- Healthcare
- Industry
- Office
- Leisure

Edges	Module size (mm)	Weight (kg/m ²)	MS / MS Easy Access (mm)	Recommended installation System	Recycled Content	 Full Scope - V 4.0	A1-A3 Production stage impact (kg CO ₂ eq/m ²)*	A1-C4 Full life cycle impact (kg CO ₂ eq/m ²)*
 A24	1200 x 600 x 40	4.1	43 / 43	Rockfon® System VertiQ® T24 A Wall	39%	Silver	3.47	4.68
	1800 x 600 x 40		43 / 43	Rockfon® System VertiQ® T24 A Wall				
	2400 x 600 x 40		43 / 43	Rockfon® System VertiQ® T24 A Wall				
	1200 x 1200 x 40		43 / 43	Rockfon® System VertiQ® T24 A Wall				
 A HAT	1200 x 600 x 40	4.1	43 / Not demountable	Rockfon® System VertiQ® HAT A Wall	39%	Silver	3.47	4.68
	1800 x 600 x 40		43 / Not demountable	Rockfon® System VertiQ® HAT A Wall				
	2400 x 600 x 40		43 / Not demountable	Rockfon® System VertiQ® HAT A Wall				
	1200 x 1200 x 40		43 / Not demountable	Rockfon® System VertiQ® HAT A Wall				

MS = Minimum suspension

MS easy access = Minimum suspension - tiles demountable


* For full environmental impact disclosure, see our product EPDs available on rockfon.link/cee-epd. Due to differences in calculation methods and scenario assumptions, environmental impact values are generally not directly comparable between manufacturers.



Performance



Sound absorption
 α_w : 0,85 (Class B)

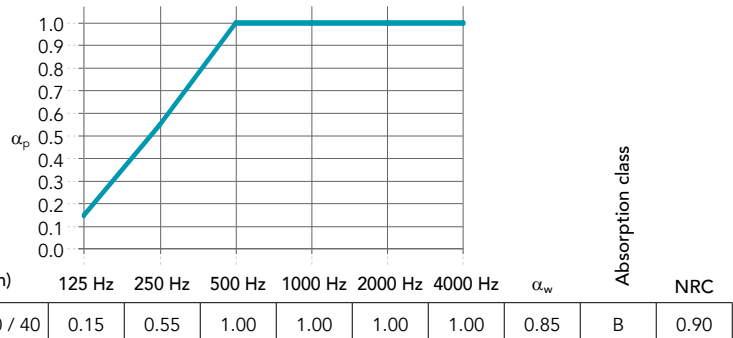

Reaction to fire
 A1



Light reflection
 72%



Humidity and sag resistance
 Up to 100% RH



Cleaning
 - Vacuum



Hygiene
 Stone wool provides no sustenance to microorganisms



Impact resistance
 Directly mounted, Rockfon Samson Wall is not recommended for use in areas which are subjected to continuous high levels of impact.
 The woven surface of Rockfon Samson provides enhanced resistance to perforation, tested in accordance with NF P 08-301.



Recyclability
 Fully recyclable stone wool



Indoor environment
 Rockfon ceiling products are classified in Class E1 in accordance with EN 13964 (EN 717-1).



Material Health
 All materials used in Rockfon products are screened against the list of substances restricted under REACH or recognized as Substances of Very High Concern (SVHC) on an ongoing basis. Rockfon stone wool fibres comply with the safe fibre EU regulation and hold an EUCEB certification.

Sounds Beautiful

