

Rockfon® Samson



Rockfon® Samson

- Impact-resistant white woven surface, ideal for high activity areas
- High sound absorption (Class A) and the highest fire safety (Class A1)
- Basic range of dimensions and edges

Product Description

- Stone wool tile
- Visible side: Woven
- Rear side: back fleece
- Painted edges

Application Areas

- Office
- Education
- Industry
- Leisure

Edges	Module size (mm)	Weight (kg/m ²)	MS / MS Easy Access (mm)	Recommended installation System	Recycled Content	 Full Scope - V 4.0	A1-A3 Production stage impact (kg CO ₂ eq/m ²)*	A1-C4 Full life cycle impact (kg CO ₂ eq/m ²)*
 A24	600 x 600 x 40	4.1	50 / 200	Rockfon® System T24 A	39%	Silver	3.47	4.68
	1200 x 600 x 40		150 / Not demountable	Rockfon® System T24 A Impact 2A/3A				
			50 / 200	Rockfon® System T24 A				
	2400 x 600 x 40		150 / Not demountable	Rockfon® System T24 A Impact 2A/3A				
 AEX	1166 x 1166 x 40	4.1	180 / 180	Rockfon® System Olympia Plus A Impact 1A	39%	Silver	3.47	4.68
 A HAT	600 x 600 x 40	4.1	41 / Not demountable	Rockfon® System HAT A	39%	Silver	3.47	4.68
	1200 x 600 x 40		41 / Not demountable	Rockfon® System HAT A				

MS = Minimum suspension

MS easy access = Minimum suspension - tiles demountable


* For full environmental impact disclosure, see our product EPDs available on rockfon.link/cee-epd. Due to differences in calculation methods and scenario assumptions, environmental impact values are generally not directly comparable between manufacturers.



Performance



Sound absorption
 α_w : up to 1,00 (Class A)

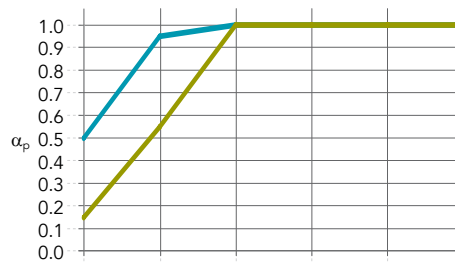

Thickness (mm) / Suspension (incl. tile - mm)	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	α_w	Absorption class	NRC
40 / 225	0.50	0.95	1.00	1.00	1.00	1.00	1.00	A	1.05
40 / 40	0.15	0.55	1.00	1.00	1.00	1.00	0.85	B	0.90



Reaction to fire
 A1



Thermal insulation
 Thermal conductivity:
 $\lambda_D = 37 \text{ mW/mK}$



Light reflection
 72%



Recyclability
 Fully recyclable stone wool



Humidity and sag resistance
 Up to 100% RH.
 No visible deflection in high humidity
 C/0N



Indoor environment
 Rockfon ceiling products are classified in Class E1 in accordance with EN 13964 (EN 717-1). Rockfon ceiling products have a very low release of VOCs. A selection of Rockfon products have achieved the following performance levels and labels in indoor air emissions:



Cleaning
 - Vacuum



Hygiene
 Stone wool provides no sustenance to microorganisms



Material Health
 All materials used in Rockfon products are screened against the list of substances restricted under REACH or recognized as Substances of Very High Concern (SVHC) on an ongoing basis. Rockfon stone wool fibres comply with the safe fibre EU regulation and hold an EUCEB certification.



Impact resistance
 40 mm: Class 1A (Rockfon System Olympia^{Plus} A Impact 1A)
 40 mm: Class 2A (Rockfon System T24 A Impact 2A/3A)

For direct mounting and depending on the degree of impact you can choose between two systems:
 40mm: Class 1A (Rockfon System HAT A with 1,0 mm thick HAT profile). For light impact applications you can use HAT profiles with a steel thickness of 0,7 mm providing no impact class.

Tested in accordance with EN13964-Annex D. Impact resistance classifications confirm the system's capability to withstand incidental or occasional impact.
 The woven surface of Rockfon Samson provides enhanced resistance to perforation, tested in accordance with NF P 08-301.

Sounds Beautiful

