

DATASHEET

# Rockfon Sonar® Activity



**Sounds Beautiful**

# Rockfon Sonar® Activity

- Designed for classrooms and open plan offices where speech intelligibility is crucial and noise and activity levels are very high
- Comes with an aesthetic white, micro-textured surface and high sound absorption when installed both suspended and direct
- Wide range of dimensions in concealed, semi-concealed and visible grid options
- Easy to clean with a vacuum and damp cloth

## Product Description

- Stone wool tile
- Visible side: micro-textured white painted fleece
- Rear side: back fleece
- Durable painted edges

## Application Areas

- Office
- Education
- Leisure

Edges	Module size (mm)	Weight (kg/m <sup>2</sup> )	MS / MS Easy Access (mm)	Recommended installation System	Recycled Content	 Full Scope - V 4.0	A1-A3 Production stage impact (kg CO <sub>2</sub> eq/m <sup>2</sup> )*	A1-C4 Full life cycle impact (kg CO <sub>2</sub> eq/m <sup>2</sup> )*
	600 x 600 x 40	3.3	50 / 200	Rockfon® System T24 A	38%	Silver	3.35	4.26
	1200 x 600 x 40		50 / 200	Rockfon® System T24 A				
	600 x 600 x 40	6.4	44 / not demountable	Rockfon® System B Adhesive	38%	Silver	4.5	6.58
	1200 x 600 x 40		44 / not demountable	Rockfon® System B Adhesive				
	1200 x 1200 x 40		44 / not demountable	Rockfon® System B Adhesive				
	1200 x 300 x 40	6.4	44 / not demountable	Rockfon® System C direct	38%	Silver	4.5	6.58
	600 x 600 x 40		44 / not demountable	Rockfon® System C direct				
	1200 x 600 x 40		44 / not demountable	Rockfon® System C direct				
	2400 x 600 x 40		44 / not demountable	Rockfon® System C direct				
	600 x 600 x 40	6.4	62 / 92	Rockfon® System XL T24 D	38%	Silver	4.5	6.58
	600 x 600 x 40	5.2	60 / 200	Rockfon® System T24 E	38%	Silver	4.34	5.93
	1200 x 600 x 40		60 / 200	Rockfon® System T24 E				
	1500 x 600 x 40		60 / 200	Rockfon® System T24 E				
	1800 x 600 x 40		60 / 200	Rockfon® System T24 E				
	2100 x 600 x 40		60 / 200	Rockfon® System T24 E				
	2400 x 600 x 40		60 / 200	Rockfon® System T24 E				

MS = Minimum Suspension

MS easy access = Minimum suspension - tiles demountable

Installation of Rockfon Sonar Activity in Rockfon System XL T24 D require an extra hanger on all 1800 cross tees. The extra hanger has to be placed app. 550 mm from a main runner.


\* For full environmental impact disclosure, see our product EPDs available on [rockfon.link/cee-epd](https://rockfon.link/cee-epd). Due to differences in calculation methods and scenario assumptions, environmental impact values are generally not directly comparable between manufacturers.



## Performance



**Sound absorption**  
 $\alpha_w$ : up to 1,00 (Class A)

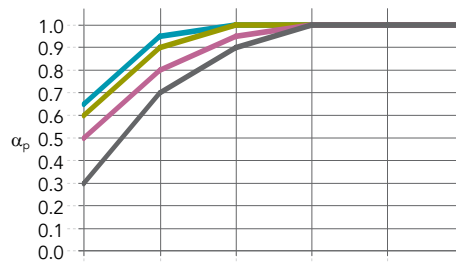

Edge / Thickness (mm) /  
 Suspension (incl. tile - mm)

	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	$\alpha_w$	Absorption class	NRC
A: 40 / 200	0.65	0.95	1.00	1.00	1.00	1.00	1.00	A	1.00
E: 40 / 200	0.60	0.90	1.00	1.00	1.00	1.00	1.00	A	1.00
Other edges: 40 / 200	0.50	0.80	0.95	1.00	1.00	1.00	1.00	A	0.95
Other edges: 40 / 40	0.30	0.70	0.90	1.00	1.00	1.00	0.95	A	0.90



**Reaction to fire**  
 A1



**Light reflection**  
 85 %



**Humidity and sag resistance**  
 Up to 100% RH.  
 No visible deflection in high humidity  
 C/0N



**Cleaning**

- Vacuum
- Damp cloth
- Chemical resistance: resistant to diluted solutions of ammonia, chlorine and hydrogen peroxide



**Hygiene**  
 Stone wool provides no sustenance to microorganisms



**Clean room**  
 ISO Class 5



**Thermal insulation**  
 Thermal conductivity:  
 $\lambda_D = 40 \text{ mW/mK}$   
 Thermal resistance:  
 $R = 1,00 \text{ m}^2\text{K/W}$



**Recyclability**  
 Fully recyclable stone wool



**Indoor environment**  
 Rockfon ceiling products are classified in Class E1 in accordance with EN 13964 (EN 717-1). Rockfon ceiling products have a very low release of VOCs. A selection of Rockfon products have achieved the following performance levels and labels in indoor air emissions:



**Material Health**  
 All materials used in Rockfon products are screened against the list of substances restricted under REACH or recognized as Substances of Very High Concern (SVHC) on an ongoing basis. Rockfon stone wool fibres comply with the safe fibre EU regulation and hold an EUCEB certification.

Rockfon production facilities are certified according to the ISO 9001 and ISO 14001 management systems standards.

# Sounds Beautiful

